EASO STEREO CO., LTD.

4F, No. 951, Chung Cheng Road, Chung Ho City. Taipei. 235 Taiwan. R.O.C.

Tel: 886-2-82281100 Fax: 886-2-82286101 E-mail : easoco@ms17.hinet.net, easoco22@ms77.hinet.net

RSA series

RSB series

500w x 1 PCB

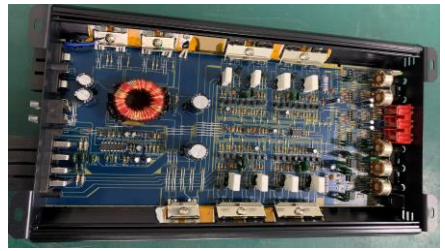

60w x 4 PCB

Entry level RSA & RSB series

MODEL		402	502	602	852	404	604	854	350D	500D	1000D
SPECIFICATION											
Amplifier class	AB, D, FD	**class AB**	**class AB**	**class AB**	**class AB**	**class AB**	**class AB**	**class AB**	**class D**	**class D**	**class D**
RMS output at 4Ω,	1% THD	**40W x 2**	**50W x 2**	**60W x 2**	**85W x 2**	**40W x 4**	**60W x 4**	**85W x 4**	**120W x 1**		
1 KHz@A/W. DC14.4V	10% THD										
RMS output, 2%THD.	at 2Ω	**60W x 2**	**70W x 2**	**80W x 2**	**105W x 2**	**60W x 4**	**80W x 4**	**105W x 4**	**210W x 1**		
(1 KHz@A/W)	at 1Ω								**320W x 1**	**500W x 1**	**1000W x 1**
	Bridge(4Ω)	**120W x 1**	**140W x 1**	**160W x 1**	**210W x 1**	**120W x 2**	**160W x 2**	**210W x 2**			
Number Of Channels	Channel	**2/1 Channel**	**2/1 Channel**	**2/1 Channel**	**2/1 Channel**	**4/3/2 Channel**	**4/3/2 Channel**	**4/3/2 Channel**	**Mono Block**	**Mono Block**	**Mono Block**
Channel Seperation	dB										
Freq. Response(+/- 3dB)	Hz	**10Hz~45KHz**	**10Hz~30KHz**	**10Hz~30KHz**	**10Hz~30KHz**	**10Hz~30KHz**	**10Hz~30KHz**	**10Hz~30KHz**	**10Hz~300KHz**	**10Hz~300KHz**	**10Hz~300KHz**
S/N Ratio @A/W 30k	dB	**≥90dB**	**≥90dB**	**≥90dB**	**≥90dB**	**≥90dB**	**≥90dB**	**≥90dB**	**≥90dB**	**≥90dB**	**≥90dB**
Sensitivity		**200mV~6V**	**200mV~6V**	**200mV~6V**	**200mV~6V**	**200mV~6V**	**200mV~6V**	**200mV~6V**	**200mV~6V**	**200mV~6V**	**200mV~6V**
High Pass Filter(- 6dB)	Hz	**65Hz - 1KHz**	**65Hz - 1KHz**	**65Hz - 1KHz**	**65Hz - 1KHz**	**65Hz - 1KHz**	**65Hz - 1KHz**	**65Hz - 1KHz**	**-**	**-**	**-**
Low Pass Filter(- 12dB)	Hz	**50Hz - 360Hz**	**50Hz - 360Hz**	**50Hz - 360Hz**	**50Hz - 360Hz**	**50Hz - 360Hz**	**50Hz - 360Hz**	**50Hz - 360Hz**	**50Hz - 170Hz**	**50Hz - 170Hz**	**50Hz - 170Hz**
Bass boost	Hz	**55Hz**	**55Hz**	**55Hz**	**55Hz**	**55Hz**	**55Hz**	**55Hz**	**45Hz**	**45Hz**	**45Hz**
High Level Input	V										
Indicator	Power	**Yes**	**Yes**	**Yes**	**Yes**	**Yes**	**Yes**	**Yes**	**Yes**	**Yes**	**Yes**
	Protection	**Yes**	**Yes**	**Yes**	**Yes**	**Yes**	**Yes**	**Yes**	**Yes**	**Yes**	**Yes**
Protection Circuit	Short	**Yes**	**Yes**	**Yes**	**Yes**	**Yes**	**Yes**	**Yes**	**Yes**	**Yes**	**Yes**
	Thermal	**80°C**	**80°C**	**80°C**	**80°C**	**80°C**	**80°C**	**80°C**	**80°C**	**80°C**	**80°C**
Sub Level Remote control		**-**	**-**	**-**	**-**	**-**	**-**	**-**	**Yes**	**Yes**	**Yes**
Fuse	A	**20A*1**	**25A*1**	**30A*1**	**30A*1**	**30A*1**	**25A*2**	**30A*2**	**25A*2**	**30A*3**	**40A*3**
Weight (NW)	Kg	**1.5**	**1.7**	**1.8**	**1.85**	**1.95**	**2.05**	**2.25**	**1.65**	**2.3**	**2.7**
Dimension(L x W x H) w/ end cap	mm	190x190x53	195x190x57	205x190x53	260x190x57	280x190x57	320x190x57	330x190x57	260x190x53	285x190x57	315x190x57
Unit Price(FOB China)	US$										
MOQ	Pcs										